



Product number	Lid Color Code	Single Family Application In GDP	Other than single family applications in GDP			Primary Filtration Size
			<300 CBOD <sup>5</sup>	300-600 CBOD <sup>5</sup>	601 CBOD <sup>5</sup>	
LT-1/8	BLACK	3500	3000	2500	2000	1/8"
LT-1/16	GREY	3350	2750	2000	1500	1/16"
*LT-1/32	GREEN	3000	2500	1875	1500	1/32"
*LT-64	WHITE	2500	2000	1750	1500	1/64"

<sup>\*</sup>TO BE USED IN COMMERCIAL APPLICATIONS. DUE TO EXTREME LEVEL OF FILTRATION, AUDIO VISUAL ALARM IS RECOMMENDED DUE TO SHORT SERVICE INTERVALS. INSPECT AS NEEDED.

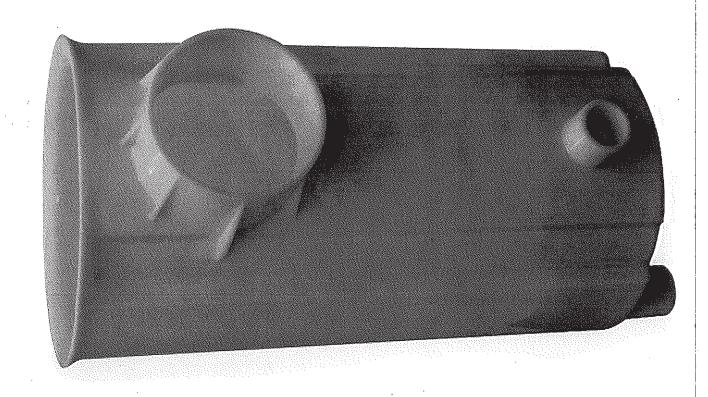

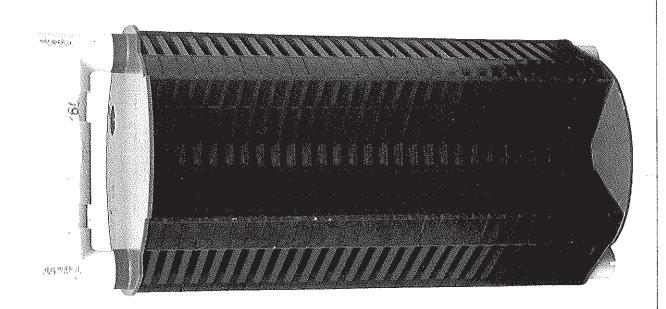

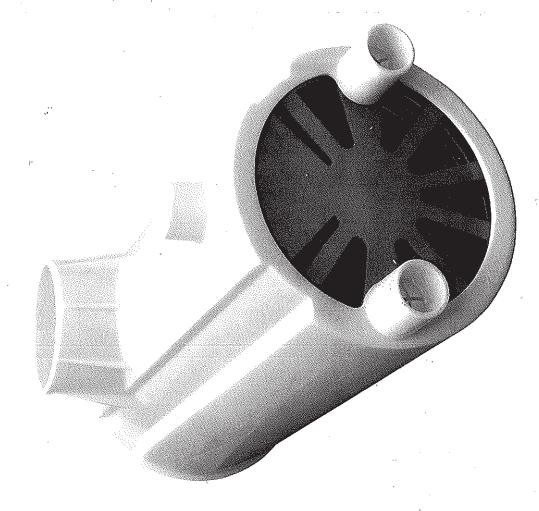

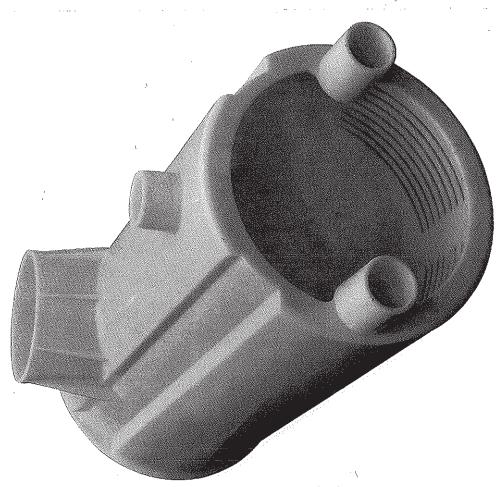



## Installation and Maintenance Instructions

## Installation

Step 1 Dry fit the filter case onto the outlet pipe going to the drain field. Ensure it is centered directly under the access opening. (if outlet pipe is already in a fixed position, additional pipe may need to be added)

Step 2 If utilizing the additional single side support and the two bottom supports: While the case is still dry fit to the outlet pipe, measure and cut 1"schedule 40 pvc pipe to the length needed to extend from the hubs that are pre-molded into the case to the side wall and the inside floor of tank. solvent weld pipe into the hubs that are pre-molded onto the case.

Step 3 Solvent weld the case to the outlet pipe. Insert the filter cartridge into the case pressing down on the cartridge until it locks into place at the bottom of case.

Step 4 if utilizing a vertical read switch: Insert switch into the hole pre-molded into the top of the filter. Press straight down until it locks into place

## Maintenance

- 1) Remove the access lid of the tank. Note: To ensure undesirable solids do not exit the tank and into the drain field, the tank should be pumped out until the level of effluent is below the outlet level of the tank.
- 2) To remove the filter cartridge from the filter case, pull up firmly on the handle of the cartridge dislodging it from the case. (if utilizing a vertical read switch, removal of switch is optional)
- 3) Using an ordinary garden hose, rinse the filter cartridge ensuring all visible septage material is removed.
- 4) Place the filter cartridge back into the filter case pressing down on the cartridge until it locks into place.
- 5) Place the access lid back onto the tank ensuring it is secure.

RECEIVED

FEB 6 2014

SAFETY & BUILDINGS

Lifetime filter has a lifetime limited warranty:

Lifetime filter LLC warrants the filter will be free of manufacturing and workmanship defects during normal use for the period of time the original purchaser owns the product. Lifetime filter will provide a replacement filter in the event that the original filter was not damaged during the installation or maintenance process. Damage to this product caused by accident, misuse or abuse will not be covered under this warranty. Improper care or malfunctions resulting from product not being installed, operated or maintained properly will void this warranty. Lifetime filter assumes no responsibility for labor charges, removal charges, installation or other incidental or consequential costs.

Contact: mike@lifetimefilterllc.com Phone: 502-724-2231